


The Kuala Lumpur Convention Centre is located in the downtown area of Kuala Lumpur, as a leading international conference hall in Malaysia. In this building, Fujitec installed 28 elevators including observation models featuring an innovative circular design, and 21 gracefully-designed escalators. Fujitec products are widely used in the Centre where international conferences that are attended by many world's VIPs and exhibitions that attract people from around the world are held.



Owner	Kuala Lumpur Convention Centre Sdn. Bhd.
Architect	Akitek Jururancang(M) Sdn. Bhd.
Contractor	Sunway Construction Sdn. Bhd.

Building name	Location	Completion	Total units	
Kuala Lumpur Convention Centre	Kuala Lumpur Convention Centre	2005	Elevator	28
			Escalator	21

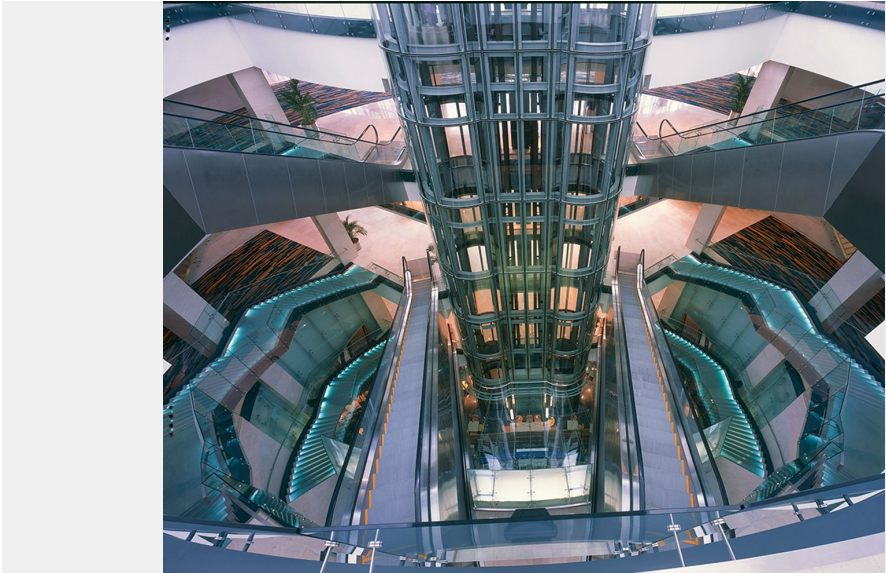



Building name

Kuala Lumpur Convention Centre

Location

Kuala Lumpur Convention Centre

Completion

2005

Total units

Elevator 28
Escalator 21

Specifications

Elevator

Model	Use	Capacity (kg)	Capacity (person)	Speed (m/min)	Stop number of floors (floor)	unit
AC-GD	Passenger	1630	22	60	8	2
AC-GD	Passenger	1630	22	60	7	2
AC-GD	Passenger	1630	22	60	8	2
AC-GD	Passenger	1630	22	60	9	1
AC-GD	Passenger	1630	22	60	8	1
AC-GD	Passenger	1630	22	60	7	2
AC-GD	Passenger	1630	22	60	6	2
AC-GD	Passenger	1225	16	60	7	2
AC-GD	Passenger	1225	16	45	5	1
AC-GD	Passenger	1225	16	45	3	1
AC-GL	Passenger	1020	14	60	2	1
AC-GL	Passenger	885	12	60	2	2
AC-GL	Passenger	885	12	60	7	1
AC-GL	Passenger	885	12	60	5	1
AC-GL	Passenger	885	12	60	2	2

Model	Use	Capacity (kg)	Capacity (person)	Speed (m/min)	Stop number of floors (floor)	unit
AC-GL	Passenger	885	12	60	2	1
AC-GL	Passenger	1020	14	60	2	1
AC-GD	Service	7000	93	30	11	1
AC-GD	Service	7000	93	30	7	1
AC-GD	Service	7000	93	30	9	1



Building name	Location	Completion	Total units
Kuala Lumpur Convention Centre	Kuala Lumpur Convention Centre	2005	Elevator 28 Escalator 21

Escalator

Model	Type	Step width (mm)	Rise (mm)	Incline (degree)	unit
GS8000	S	1200	9880	30	2
GS8000	S	1200	7920	30	2
GS8000	S	1200	6950	30	2
GS8000	S	1200	6500	30	2
GS8000	S	1200	6000	30	2
GS8000	S	1200	5400	30	2
GS8000	S	800	5400	30	2
GS8000	S	1200	5150	30	1
GS8000	S	1200	4500	30	2
GS8000	S	1200	4000	30	2
GS8000	S	1200	3600	30	2