



Building name

Urbannet Sapporo Link Tower

Location

Sapporo, Hokkaido

Completion

2026

Total units

Elevator 21
Escalator 11

“Urban Net Sapporo Link Tower” is a large twenty-six (26) -story complex building located on Sapporo Ekimae-dori, comprising offices, retail facilities, and a hotel, etc. As a new landmark in Sapporo, it serves as a hub for vitality and interaction.Fujitec has supplied twenty-one (21) elevators and eleven (11) escalators for this building. The elevators are equipped with “EZ-SHUTTLE,” Japan’s first independently operating destination selection system, which efficiently guides passengers to their desired floors, thereby reducing congestion and improving travel efficiency.Additionally, the design integrates the car indication display with the lobby lantern, creating a stylish aesthetic that harmonizes with the office space. The escalators feature “Slim Fit,” which achieves one of the industry’s most compact designs, supporting comfortable and smooth movement in spaces with heavy public traffic.m Fit,” which achieves one of the industry’s most compact designs, supporting comfortable and smooth movement in spaces with heavy public traffic.



Owner	NTT Urban Development Corporation
Architect	KUME SEKKEI Co., Ltd.
Contractor	Taisei Corporation



Building name

Urbannet Sapporo Link Tower

Location




Sapporo, Hokkaido

Completion

2026

Total units

Elevator 21
Escalator 11

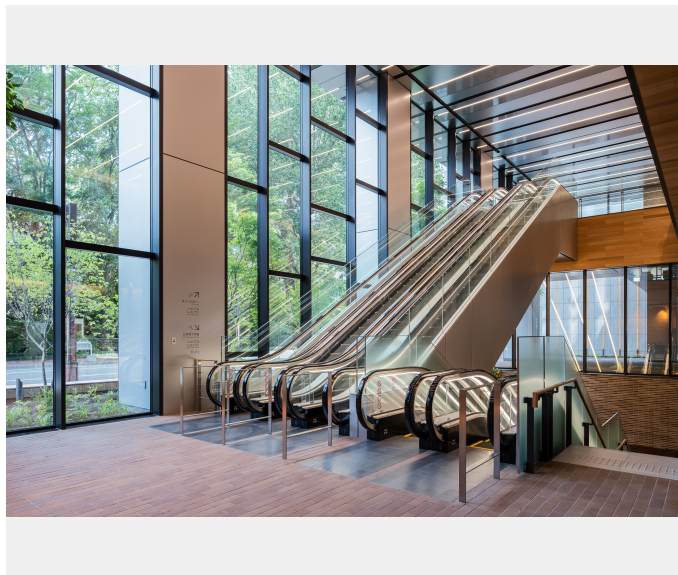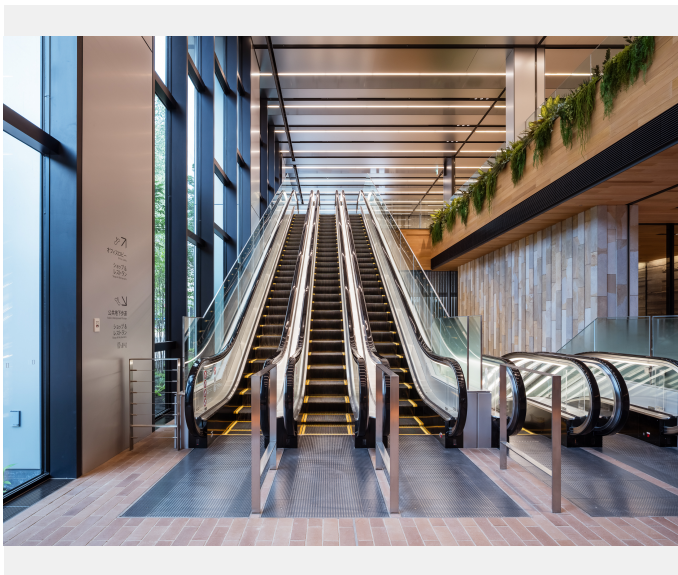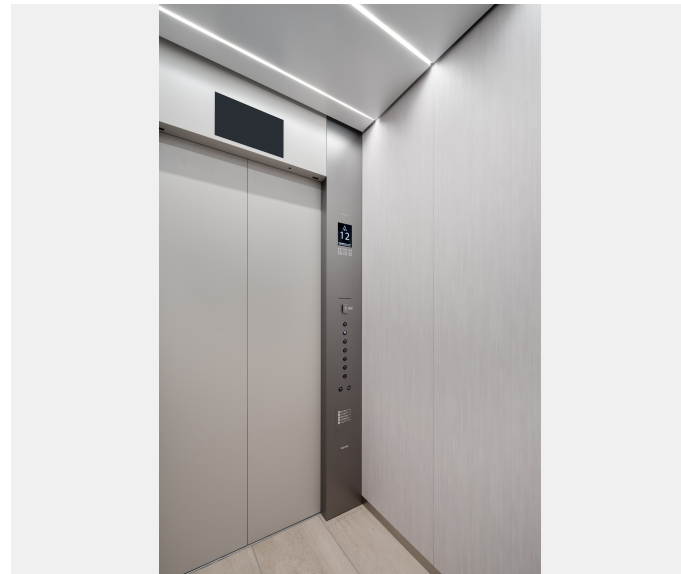



Building name	Location	Completion	Total units
Urbannet Sapporo Link Tower	Sapporo, Hokkaido	2026	Elevator 21 Escalator 11

Specifications
Elevator

Model	Use	Capacity (kg)	Capacity (person)	Speed (m/min)	Stop number of floors (floor)	unit
PM-GL	Passenger	1300	20	180		2
PM-GL	Passenger	1350	20	150		5
PM-GL	Passenger	1350	20	120		5
PM-GL	Service	1700	26	180		1
PM-GL	Service	1150	17	180		1
PM-GL	Service	1600	24	120		1
Order XIOR	Passenger	1000	15	105		3
Order XIOR	Passenger	1000	15	60		1
Order XIOR	Service	1600	24	60		1
Order XIOR	Service	1500	15	60		1

Escalator

Model	Type	Step width (mm)	Rise (mm)	Incline (degree)	unit
GS-NX	F	600	5750	35	2
GS-NX	F	600	5000	35	2
GS-NX	S	600	2150	35	2
Slimfit	F	600	5750	30	3
Slimfit	F	600	5200	30	2